




Packaging Machinery & Systems
made for you

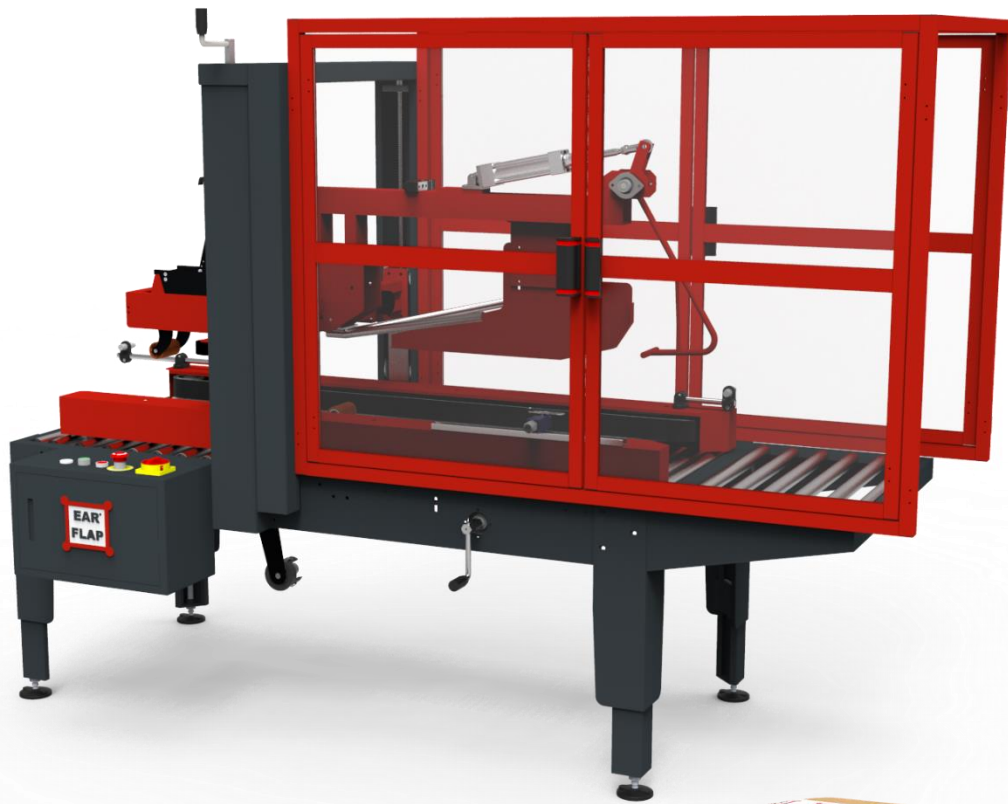

Automatic case sealer
single format

P35



STANDARD TECHNICAL FEATURES

- Production variable according to carton format
- Dimensional adjustment: Manual
- Carton sealing top and bottom.
- Carton dragging by side belts with independent motors
- Adjusting working height from 570 mm to 800 mm
- Interchangeable taping head which allows using tape from 48mm to 72 mm width.



Carton dimensions

- Type: RSC or B1
- Length: 150/400 – 700 mm*
- Width: 115 – 510 mm
- Height: 150 - 500 mm

* The maximum length of the box will depend on its width, its maximum length being 700 mm with 115 mm wide boxes and 400 mm with 510 mm wide boxes

Other dimensions on request (can be extra cost)

The quality and format of the cases must be verified and approved by the EARFLAP technical office



Optional

- Stainless steel 304
- Carton sealing with Hot-Melt
- Measures of special cartons
- ATEX

Closed process



Optional: Carton sealing with Hot-Melt (Consult carton dimensions)





Technical features	Standard
Electric power:	220V 50 Hz Single phase
Installed power:	0,45 Kw
Pneumatic installation:	6 bar
Belts speed:	21 m/min.
Carton sealing top and bottom	Tape (48 to 72 mm)
Dimensional adjustment:	Manual
Production (variable according to format):	According to carton format

Standard main components	
PLC:	Optional for automatic process
Pneumatic components:	AIRTAC
Safety devices:	Limit switch: Tend
Hot-Melt equipment (optional)	Meler

Other components or brands on request can be extra cost

Dimensiones de las cajas admisibles	P35	P35HM (Hotmelt)
Length:	150/400 – 700 mm	Consult
Width:	115 – 510 mm	Consult
Height:	150 – 500 mm	Consult

* The maximum length of the box will depend on its width, its maximum length being 700 mm with 115 mm wide boxes and 400 mm with 510 mm wide boxes

Other dimensions on request (can be extra cost)

The quality and format of the cases must be verified and approved by the EARFLAP technical office

Options

Stainless steel AISI 304
Carton sealing top and/or bottom con Hot-Melt
Tape end detector with alarm
Automatic dimensional adjustment
Conveyors of free rollers infeed/outfeed of different lengths
Motorized conveyors (rollers or bands) infeed/outfeed of different lengths
Other colors on request (can be extra cost)

Standard machine layout

