



Packaging Machinery & Systems
made for you



Semiautomatic Case Sealer
for random formats

P25




STANDARD TECHNICAL FEATURES

- Carton dragging by side belts with independent motors.
- Top and bottom carton sealing.
- Weight 140 Kg.
- Adjustable height from 600 to 750 mm.
- Adjustable tape tension.
- Interchangeable taping head which allows using tape from 48mm to 72 mm width.
- Metal rollers for the transportation of the carton.
- Adjustable top guides to keep flaps squared while sealing.
- Automatic adjustment of carton width and height.
- Emergency stop on top taping head for a quick access.

Carton dimensions

- Type: RSC or B1
- Length: 100 – ∞ mm
- Width: 130 – 490 mm
- Height: 120 - 500 mm


The quality and format of the cases must be verified and approved by the EARFLAP technical office

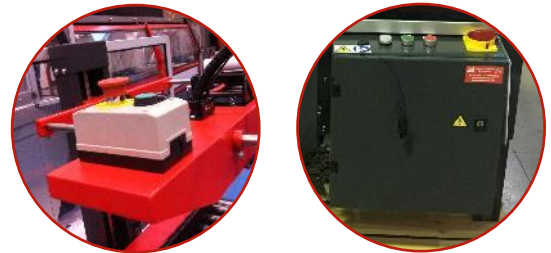

Optional

- Inox 304 – Stainless Steel
- Special dimensions

Closing process

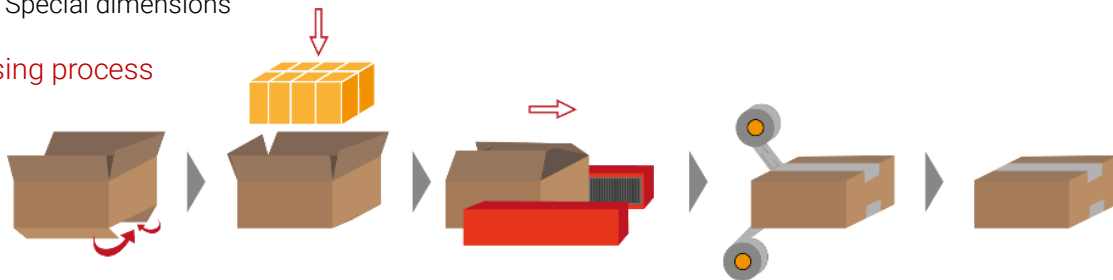

Automatic dimensional adjustment



Simple maintenance of the taping heads



Photo: P25INOX – Stainless Steel


Technical Features	Standard
Electric power:	220 V 50 Hz Single phase
Installed power:	0,45 Kw
Air pressure:	6 bar
Belts speed:	20 m/min.
Top and bottom carton sealing:	Tape (from 48 to 72 mm)
Dimensional adjustment:	Automatic
Production (variable depending on format):	Depending on carton format and operator

Acceptable carton dimensions	P25
Length:	100 – ∞ mm
Width:	130 – 490 mm
Height:	120 – 500 mm

The quality and format of the cases must be verified and approved by the EARFLAP technical office

Options

Stainless Steel AISI 304
Infeed/outfeed free rollers conveyor 500 mm length
Infeed/outfeed free rollers conveyor 1000 mm length
Extensible free wheels outfeed conveyor from 1,2 m to 4,8 m
Extensible conveyor connector
Other colours son request (it can add an extra cost)

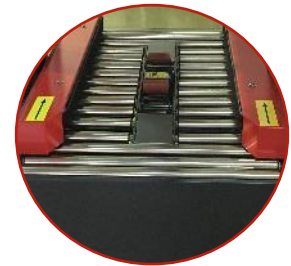

Standard P25 layout

