



Packaging Machinery & Systems  
made for you



Semiautomatic single format  
Case sealer

**P15**



## STANDARD TECHNICAL FEATURES

- Carton dragging by side belts with independent motors.
- Top and bottom carton sealing.
- Weight 140 Kg.
- Adjustable working height from 570 mm to 800 mm
- Adjustable tape tension.
- Interchangeable taping head which allows using tape from 48 mm to 72 mm width.
- Metal rollers for the transportation of carton.
  - Adjustable top guides to keep flaps squared while sealing.
  - Hand wheel adjustment of carton width and height.
- Emergency stop on top taping head for quick access.

## Carton dimensions

- Type: RSC o B1
- Length: 100 – ∞ mm
- Width: 115 – 510 mm
- Height: 120 - 490 mm

*The quality and format of the cases must be verified and approved by the EARFLAP technical office.*


*\*NOTE: In boxes that need the upper support wheels, the minimum width will be 150 mm (For more information consult options).*




## Optional

- Inox 304
- Special dimensions

## Closing process

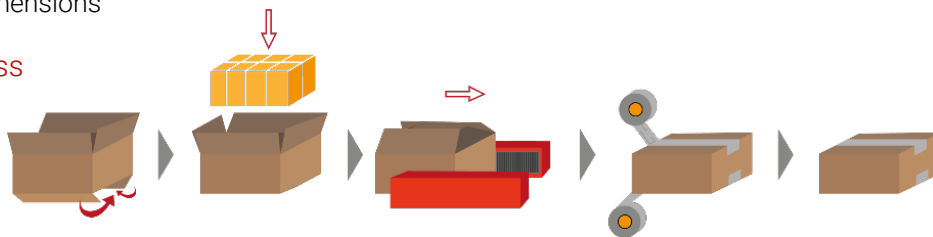

## Quickly adjustment handles

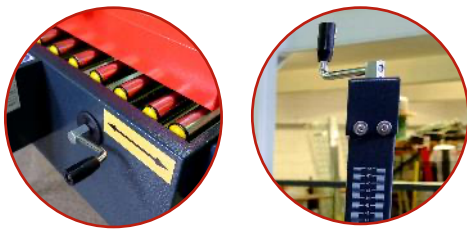

## Simple maintenance of the taping heads



Photo: P15INOX



Photo P15UD

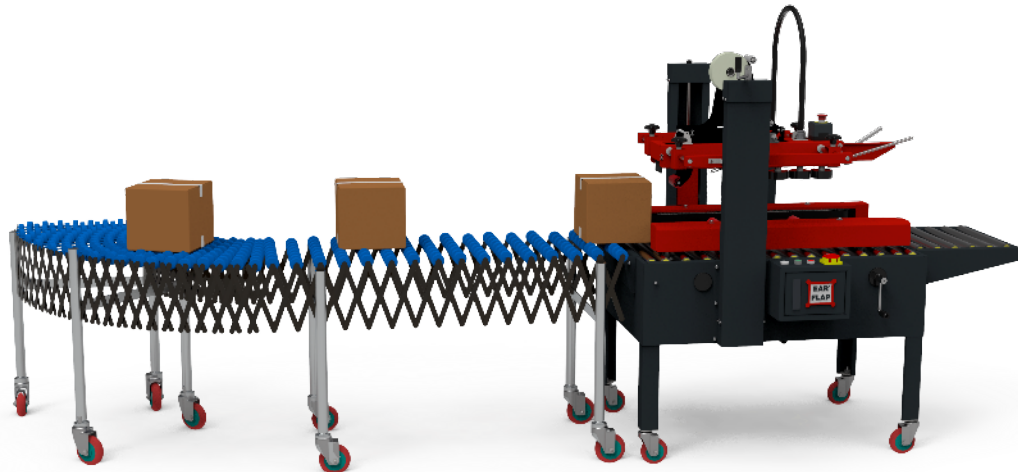


Photo: P15 + Infeed rollers conveyor L500 + 3-flaps folder + Extensible wheels conveyor

Technical features	Standard
Electric power:	220 V 50 Hz Single phase
Installed power:	0,45 Kw
Belts speed:	21 m/min.
Top and bottom carton sealing:	Tape (from 48 to 72 mm)
Dimensional adjustment:	Manual
Production (variable depending on format):	Depending on carton format and operator

Acceptable carton dimensions	P15	P15S	P15UD
Length:	100 – ∞ mm	180 – ∞ mm	100 – ∞ mm
Width:	115 – 510 mm	85 – 310 mm	150 – 570 mm
Height:	120 – 490 mm	70 – 500 mm	120 – 490 mm

*The quality and format of the cases must be verified and approved by the EARFLAP technical office.*

#### Opciones

Stainless Steel AISI 304
3-flaps folder (just in model P15)
Flap Holder (for bottom flaps)
Infeed/outfeed free rollers conveyor 500 mm lenght
Infeed/outfeed free rollers conveyor 1.000 mm lenght
Extensible free wheels outfeed conveyor from 1,2 m to 4,8 m
Extensible conveyor conector.
Other colors on request (it can add an extra cost)
For boxes less tan 150 mm wide, you can add an adapter for the upper wheels (Only for P15)



Denominación:		Dibujado:	Comprobado:
		Fecha	15/05/2013
		Nombre	Jordi M.
Cliente:		Esc: 1:15	
--		Código:	A3
			Revisión:
			P-15
			00