



Packaging Machinery & Systems
made for you



Semiautomatic single format
Case sealer with semiautomatic case former

P15F

STANDARD TECHNICAL FEATURES

- Carton dragging by side belts with independent motors.
- Top and bottom carton sealing.
- Weight 200 Kg.
- Adjustable working height from 570 mm to 830 mm
- Adjustable tape tension.
- Interchangeable taping head which allows using tape from 48 mm to 72 mm width.
- Metal rollers for the transportation of carton.
- Adjustable top guides to keep flaps squared while sealing.
- Hand wheel adjustment of carton width and height.
- Emergency stop on top taping head for quick access.

Carton dimensions

- Type: RSC o B1
- Length: 200 – 500 mm
- Width: 200 – 400 mm
- Height: 130 - 480 mm


The quality and format of the cases must be verified and approved by the EARFLAP technical office.



Optional

- Inox 304
- Special dimensions

Closing process

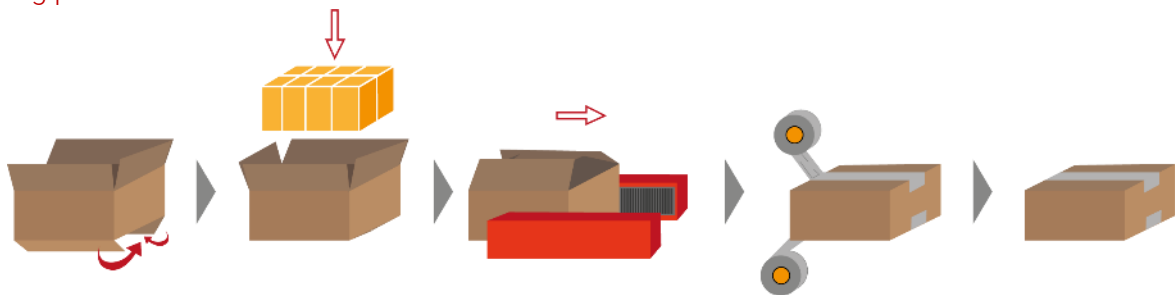

Simple maintenance of the taping heads



Quickly adjustment handles



Semiautomatic case forming





Technical features	Standard
Electric power:	220 V 50 Hz Single phase
Installed power:	0,45 Kw
Belts speed:	21 m/min.
Top and bottom carton sealing:	Tape (from 48 to 72 mm)
Dimensional adjustment:	Height: Manual / Width: Automatic
Production (variable depending on format):	Depending on carton format and operator

Acceptable carton dimensions	P15F
Length:	250 – 500 mm
Width:	200 – 400 mm
Height:	130 – 480 mm

The quality and format of the cases must be verified and approved by the EARFLAP technical office.

Opciones

Stainless Steel AISI 304
3-flaps folder (just in model P15)
Flap Holder (for bottom flaps)
Infeed/outfeed free rollers conveyor 500 mm lenght
Infeed/outfeed free rollers conveyor 1.000 mm lenght
Extensible free wheels outfeed conveyor from 1,2 m to 4,8 m
Extensible conveyor conector.
Other colors on request (it can add an extra cost)



Standard P15F layout

